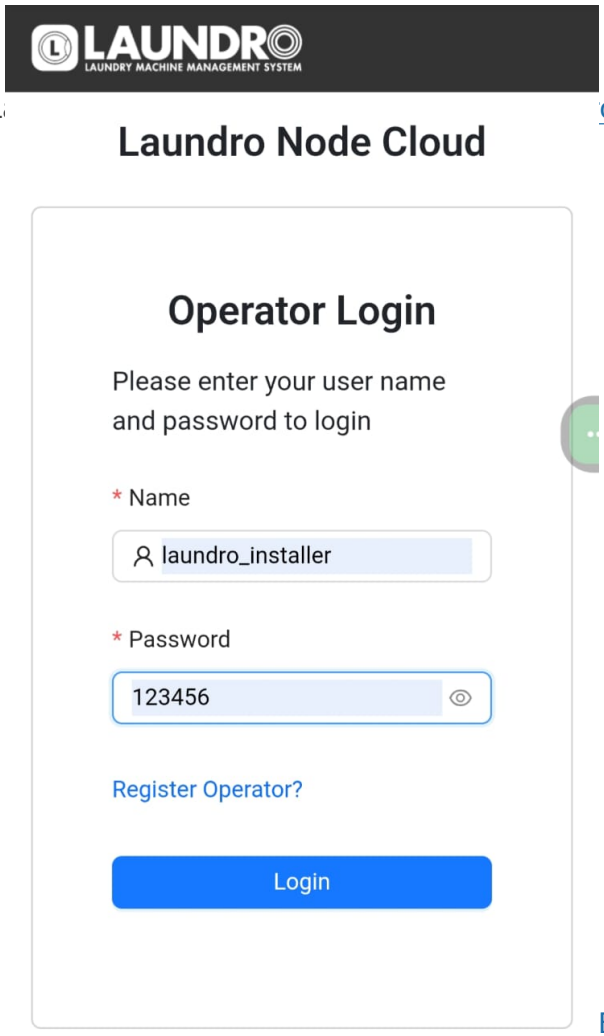
WIFI Configuration (ALPHA-1)


(A) Step-By-Step WIFI Configuration

1. Login to Node-L

o.com/login) using given username and password.


Example: Login Page

2. Search using the outlet name or ID provided, then click on the outlet to view its details.

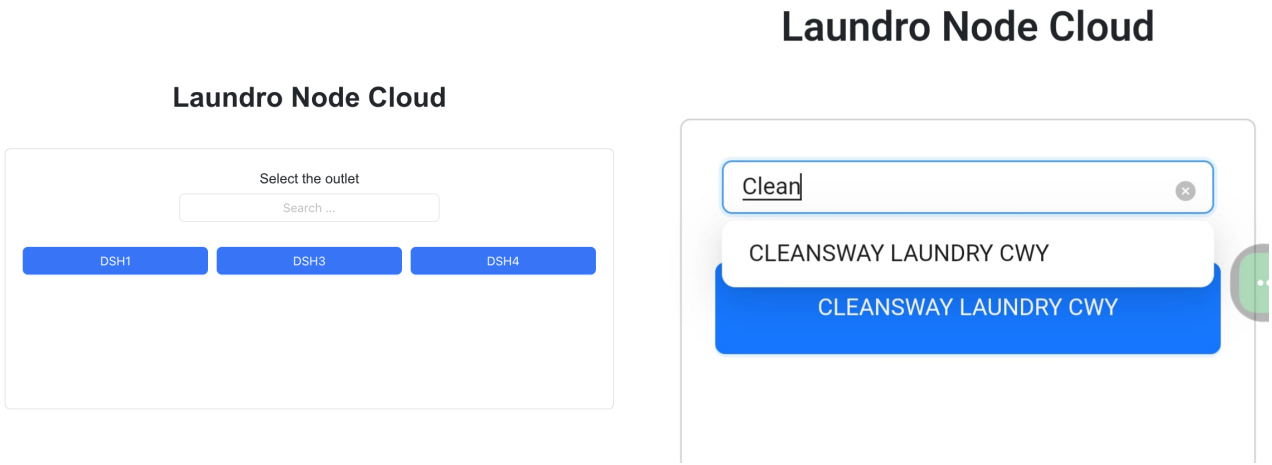


EXAMPLE: Search Outlet Name

3. By selecting an outlet name, you will be directed to the outlet details page. On this page, verify that all machine counts and details are correct before proceeding to the next step.

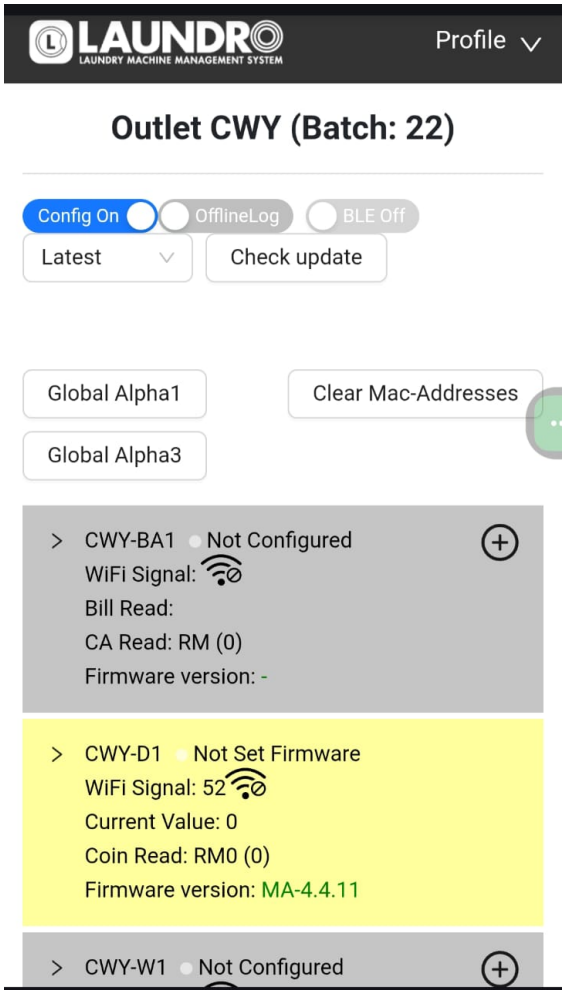


Example: Outlet Details Page

4. Click on enable config mode to allow this outlet to be configurable.

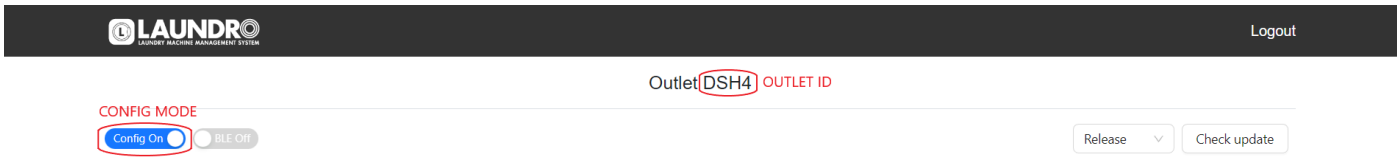


Example: On Config Mode

5. All machine details will be displayed in grey, indicating they are ready to be configured. Once a device is successfully configured, the background colour will change.

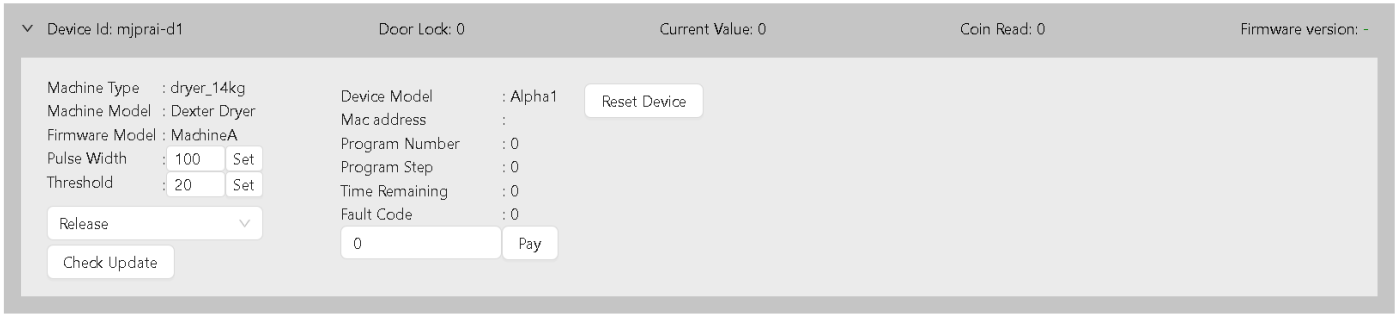

Example: Before configure device in grey colour


6. Turn a-1 device and wait for the blue light to start blinking. This indicat for configuration.

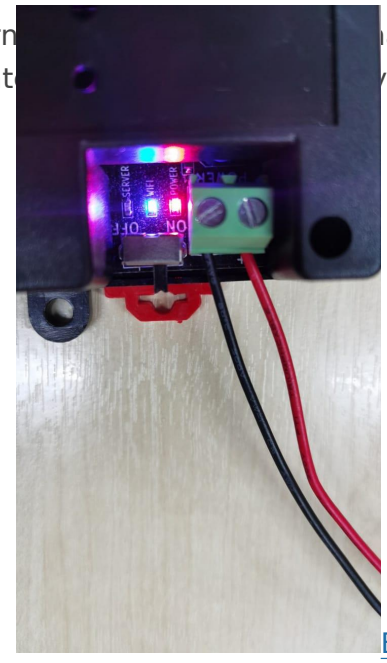


Example: Blinking blue light show it’s waiting for connection

7. Using your mobile phone, open the Wi-Fi settings. You will see the Laundro ID appear, as shown in the picture below.


8. Connect to newly broadcasted WiFi using default password (123456789)

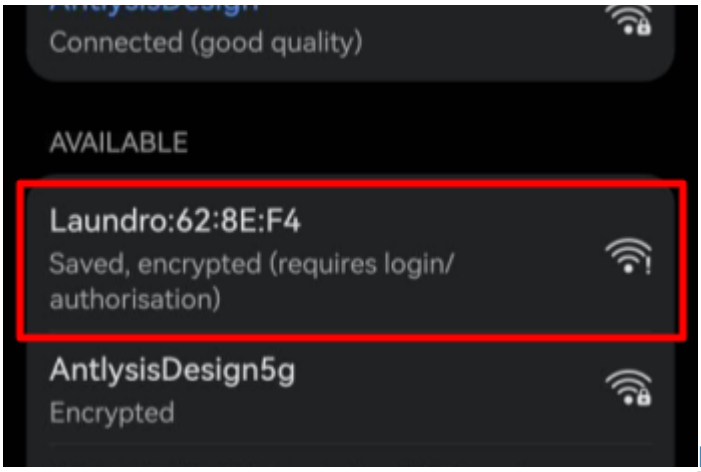

Example: Alpha-1 Laundro I'D

9. Once connected to 

will appear directing you to the Wi-Fi Manager page.

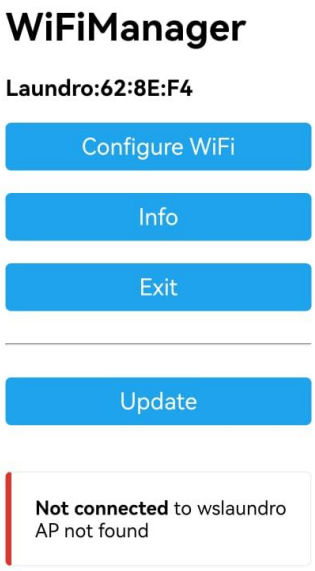


Example: WIFI Manger Page

Tip:

1. If the page doesn’t pop up, simply type **192.168.4.1** into your browser’s address bar, and the Wi-Fi Manager will open.
2. Only for **''SAMSUNG''** Mobile follow the steps below.

- Connect your Samsung mobile to the Laundro Wi-Fi.
- An **Internet Connection** pop-up will appear. Tap **“Always Connect.”**
- Tap the ⚙**settings icon**.
- Select **“Manage Router.”**
- The **Wi-Fi Manager** page will open.

10. Press **‘Configur** ation page. Then, select the correct **SSID**, enter the password, and th de Cloud.

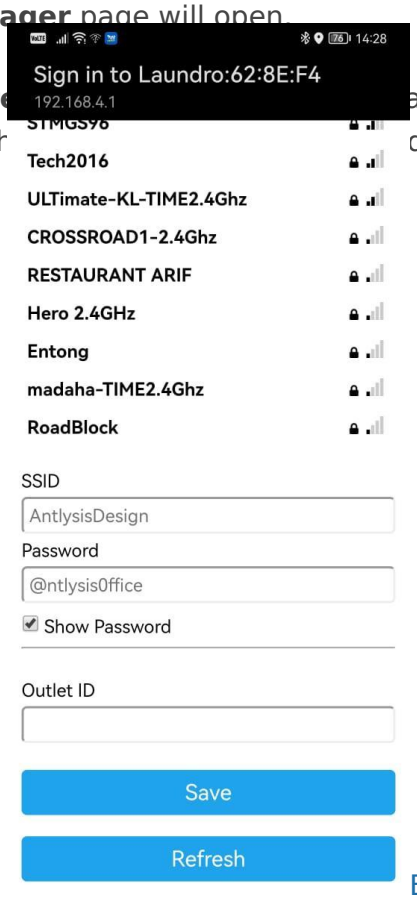


Example: WIFI Selection Mode

⚠ **Warning:** Ensure that the **Outlet ID** and **Wi-Fi password** are correct. Also, check that there are no spaces before or after the characters before saving.

11. Once the device is successfully configured to Wi-Fi, the orange and green lights will appear. You can now proceed to the cloud setup.


⚠ **Warning: Ensure all devices have their WIFI configured before proceeding to the next step.**

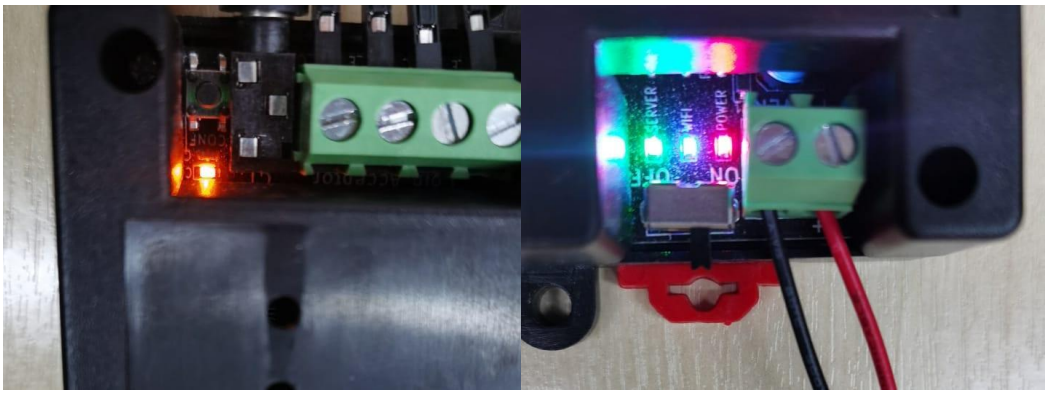

Example: **Configuration LED and other 3 LEDs (Power, WIFI & Server) are lighted up**

(B) Steps of Cloud Configuration


1. Log back in to th**s://node.thelaundro.com/login** using the provided username steps in **''(A) Step-by-Step WiFi Configuration''** un**l Page."**

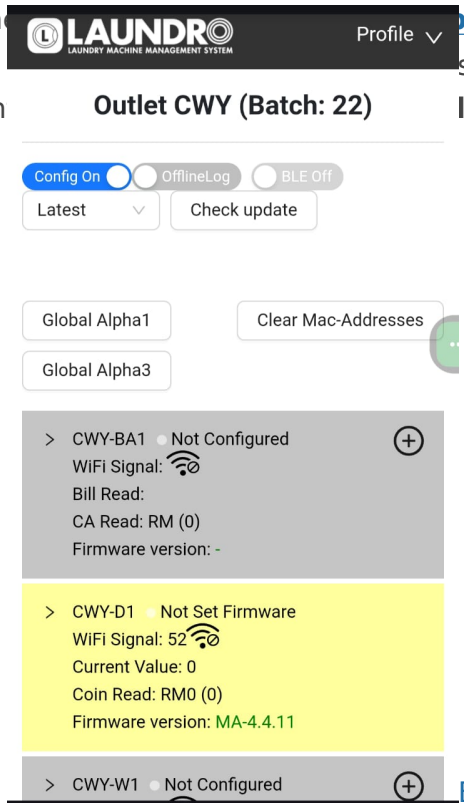

Example: Outlet Detail Page

2. Stay on this page. You will need to press the (+) icon later, but first, continue following the next steps.

3 ext to the orange light. Press it, and the orange li

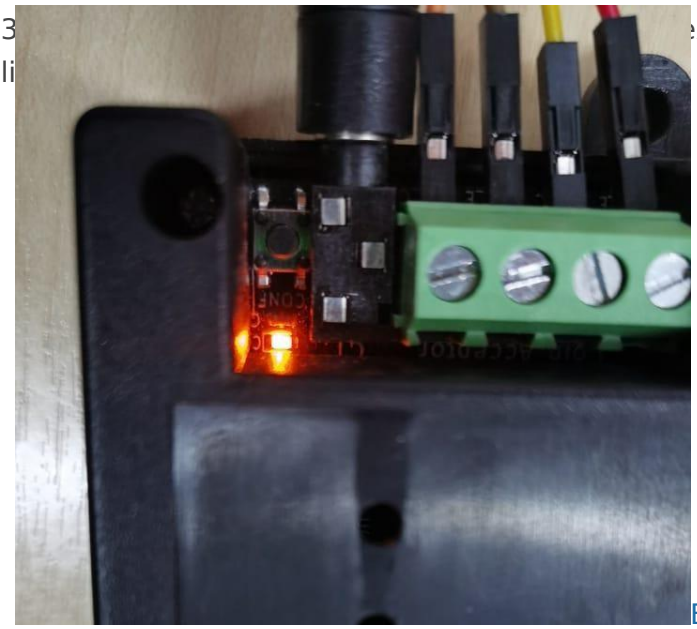


Example: Config Button near Orange LED (Config)

4. Once the orange light starts blinking, you can press the plus **(+)** icon, and the Mac address will pop up.




Example: Plus Icon

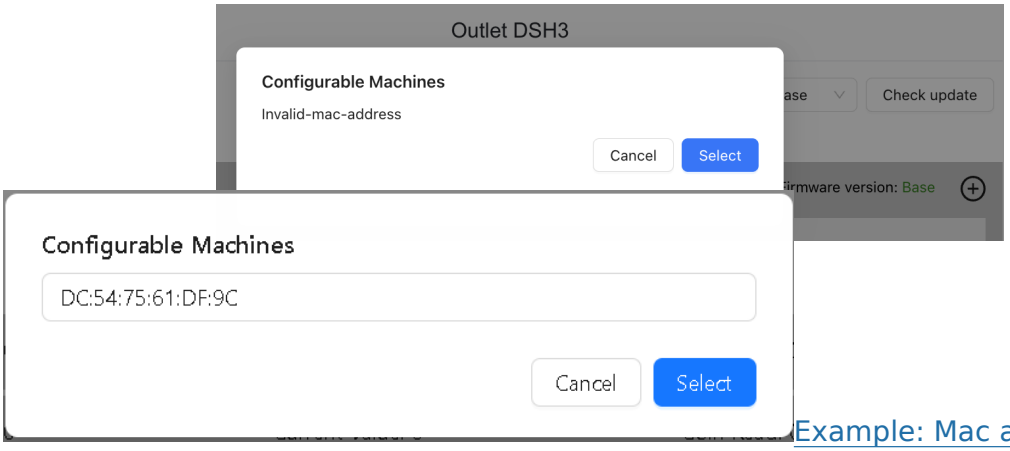


Example: Mac address Pop-up

5. Once the MAC address pops up, click *Select*.

6. After selecting the correct MAC address, the section you configured from grey will turn yellow.

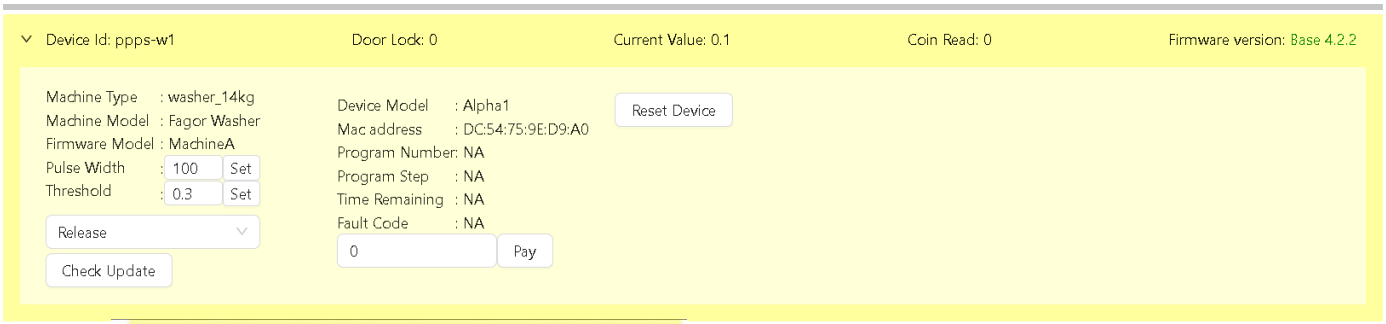

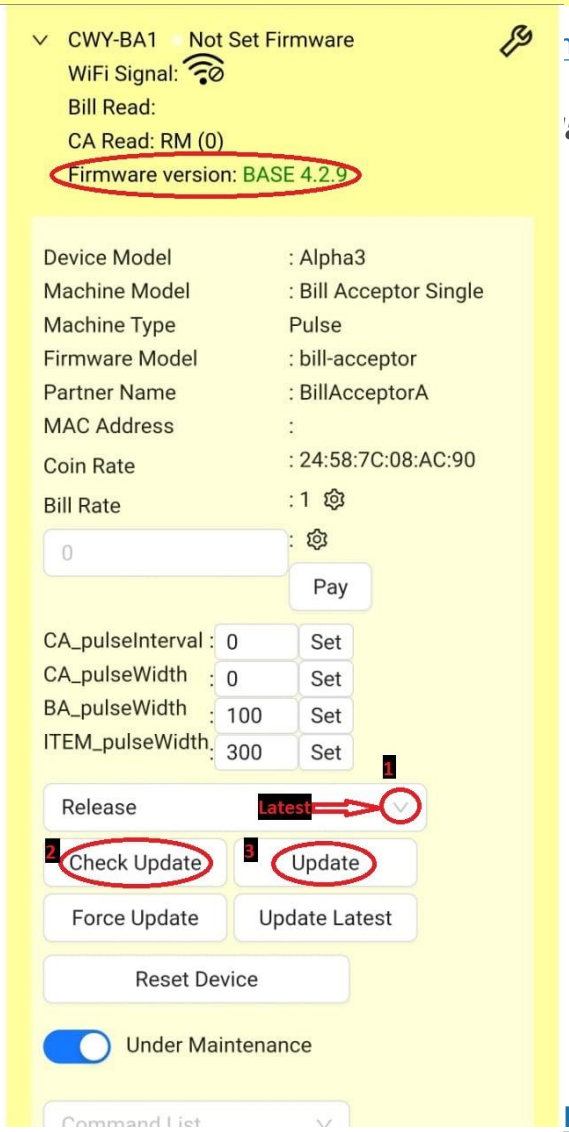

[m Grey turn to Yellow](#)


7. Select **'ate**. The latest version will appear, and you can click ***Upd***

[Example: Step by step check update](#)

Quality Note: If configuration is done in the wrong section:


1. In the Cloud App, click **Reset Device**.
2. On the device, long press the **Configure** button until the orange light appears.

3. Selec with the **Plus (+) Icon**.

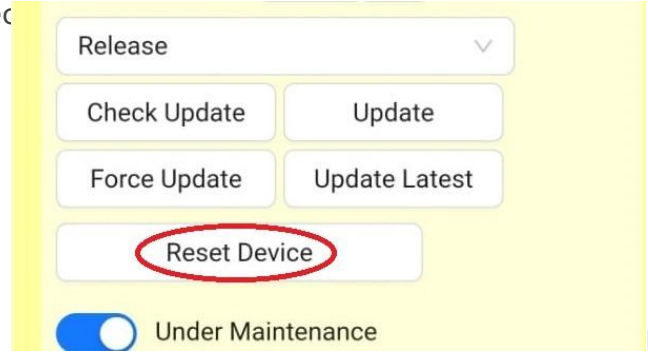

Example: Reset Device on app

8. Once the update is successful, the section will turn blue colour. You can then proceed with testing.

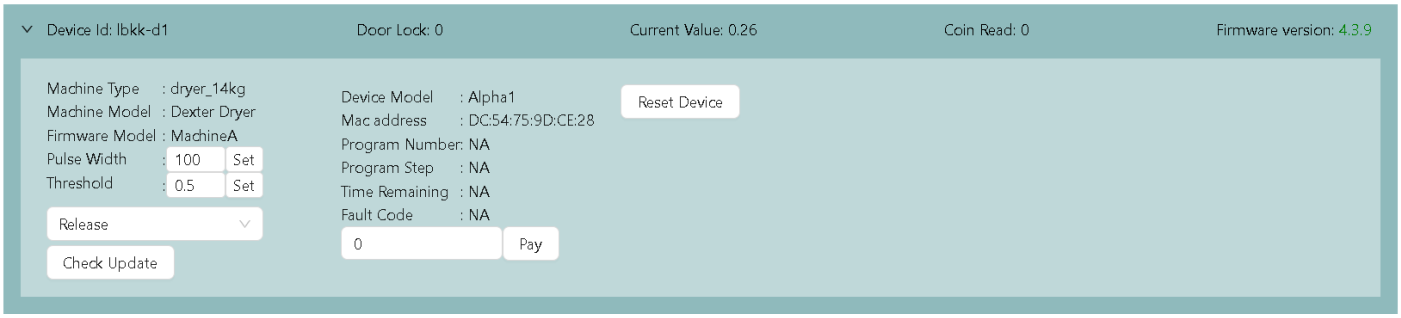

Example: Blue Colour Ready For Testing

9. When the machine's 'Current Value' exceeds the 'Threshold' value, the machine status will turn green.



Example: Current Value increase Threshold Value

(C) Status on Node

Machines are displayed with 6 types of status.

1. Grey - Not configured
2. Yellow - Pending Update
3. Blue - Idle status
4. Green - Running Status
5. Red - Offline Status
6. Bright red - Abnormal Status

Device Id: mjprai-d1 | Door Lock: 0 | Current Value: 0 | Coin Read: 0 | Firmware version: -

Machine Type : dryer_14kg
Machine Model : Dexter Dryer
Firmware Model : MachineA
Pulse Width : 100 Set
Threshold : 20 Set

Release

Check Update

Device Model : Alpha1
Mac address :
Program Number : 0
Program Step : 0
Time Remaining : 0
Fault Code : 0

Reset Device

0 Pay

Device Id: ppps-w1 | Door Lock: 0 | Current Value: 0.1 | Coin Read: 0 | Firmware version: Base 4.2.2

Machine Type : washer_14kg
Machine Model : Fagor Washer
Firmware Model : MachineA
Pulse Width : 100 Set
Threshold : 0.3 Set

Release

Check Update

Device Model : Alpha1
Mac address : DC:54:75:9E:D9:A0
Program Number: NA
Program Step : NA
Time Remaining : NA
Fault Code : NA

Reset Device

0 Pay

Device Id: lbkk-d1 | Door Lock: 0 | Current Value: 0.26 | Coin Read: 0 | Firmware version: 4.3.9

Machine Type : dryer_14kg
Machine Model : Dexter Dryer
Firmware Model : MachineA
Pulse Width : 100 Set
Threshold : 0.5 Set

Release

Check Update

Device Model : Alpha1
Mac address : DC:54:75:9D:CE:28
Program Number: NA
Program Step : NA
Time Remaining : NA
Fault Code : NA

Reset Device

0 Pay

Device Id: lbkk-d3 | Door Lock: 0 | Current Value: 3.71 | Coin Read: 6 | Firmware version: 4.3.9

Machine Type : dryer_14kg
Machine Model : Dexter Dryer
Firmware Model : MachineA
Pulse Width : 100 Set
Threshold : 0.5 Set

Release

Check Update

Device Model : Alpha1
Mac address : DC:54:75:60:F0:20
Program Number: NA
Program Step : NA
Time Remaining : NA
Fault Code : NA

Reset Device

0 Pay

Device Id: ikbnnaka-d1 | Door Lock: 0 | Current Value: 0 | Coin Read: 0 | Firmware version: 4.3.9

Machine Type : dryer_10kg
Machine Model : LG Dryer
Firmware Model : MachineA
Pulse Width : 50 Set
Threshold : 0.3 Set


Release

Check Update

Device Model : Alpha1
Mac address : DC:54:75:9C:9D:0C
Program Number: NA
Program Step : NA
Time Remaining : NA
Fault Code : NA

Reset Device

0 Pay

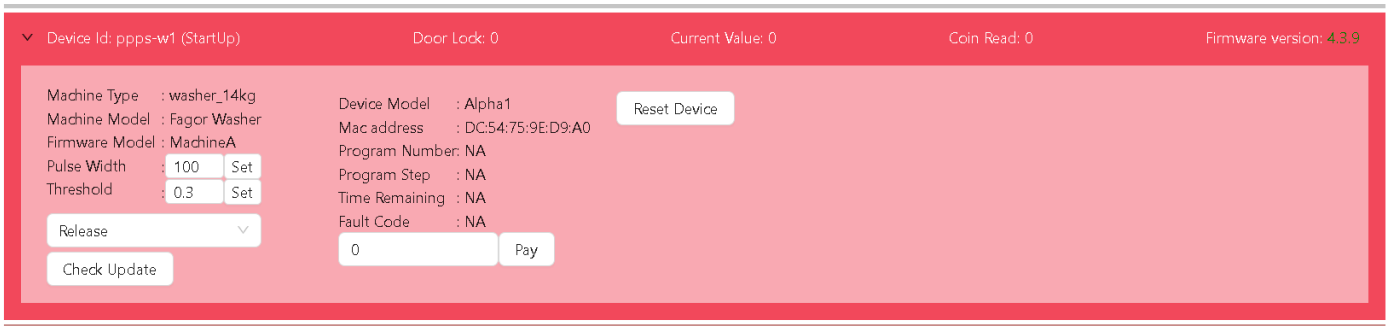

Revision #3
Created 2025-08-19 03:02:33 UTC by KUNA
Updated 2025-08-21 08:34:39 UTC by KUNA