Change connected WiFi

1) Follow the steps below to connect the device to a Wi-Fi network. Ensure that the Wi-Fi network is available and that you have the correct Wi-Fi ID/Name and password before proceeding.

> Device support only 2.4gh.

Step 1- To connect the device to a new Wi-Fi network, first ensure the device is in **Configuration Mode**. The blue LED indicator should be blinking.




Step 2- Open the **Wi-Fi Settings** page on your mobile phone and search for available Wi-Fi name **Example:'' Laundro_##:##:##''**.




Step 3: Select the **Laundro** Wi-Fi network from the list of available networks. When prompted, enter the password:

Step4 - Once the correct password has been entered, tap **Connect** to proceed.

Password: `123456789`

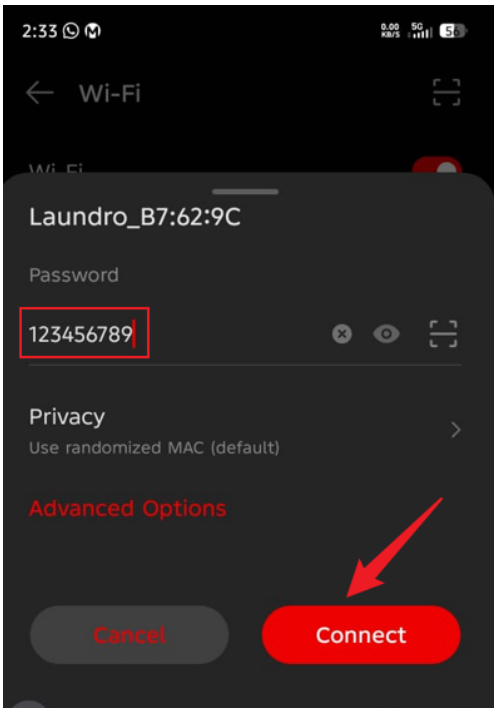


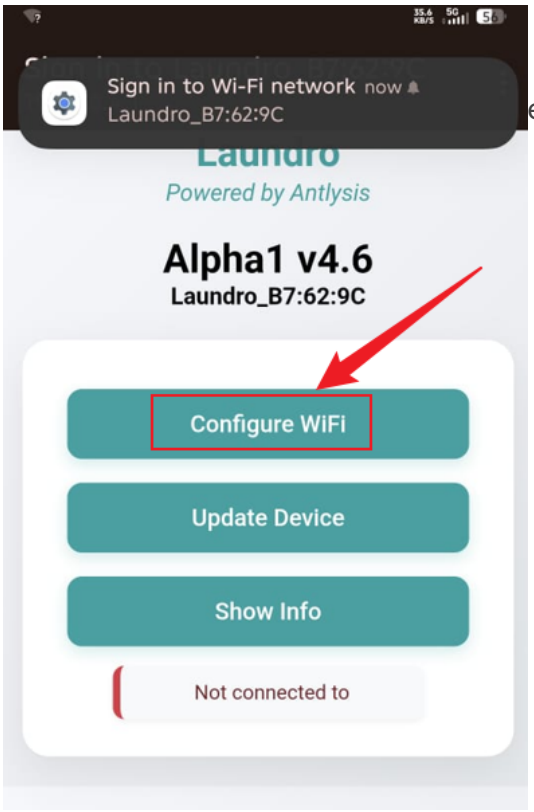

network, you will be redirected to the **Configuration Page**.


en the **Wi-Fi Configuration** page.

Step 7: From the list of available networks, choose the Wi-Fi network you want to connect to, then scroll down the page.

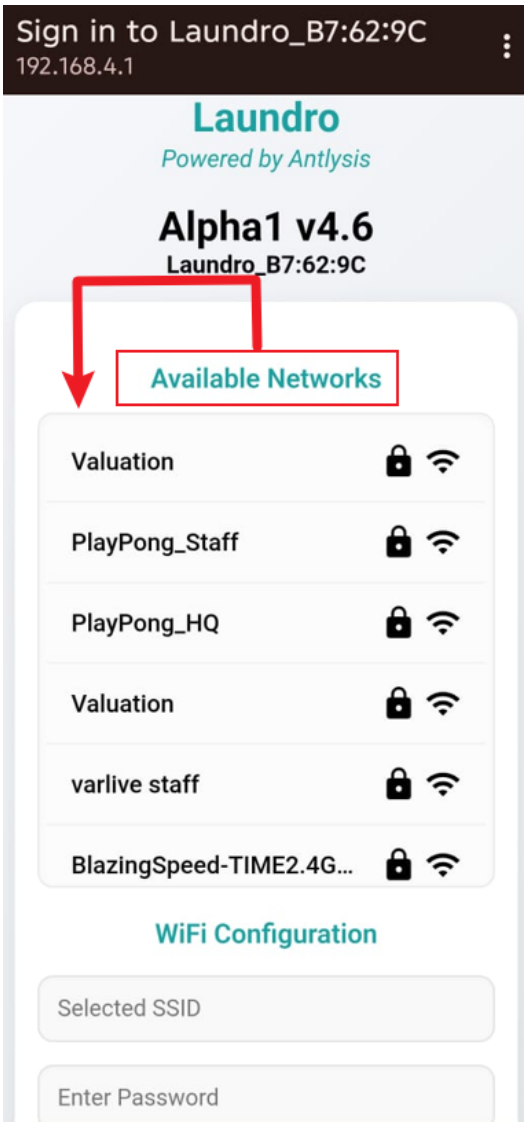



Step 8: Under **Wi-Fi Configuration**, confirm the selected **SSID (Wi-Fi Name)**, enter the Wi-Fi password, and then enter the provided **Outlet ID**. Ensure all information is correct click on **Save Configuration** .

> Before selecting **Save Configuration**, double-check the **Wi-Fi password** and **Outlet ID**. Ensure all information is correct and that no hidden spaces have been entered.

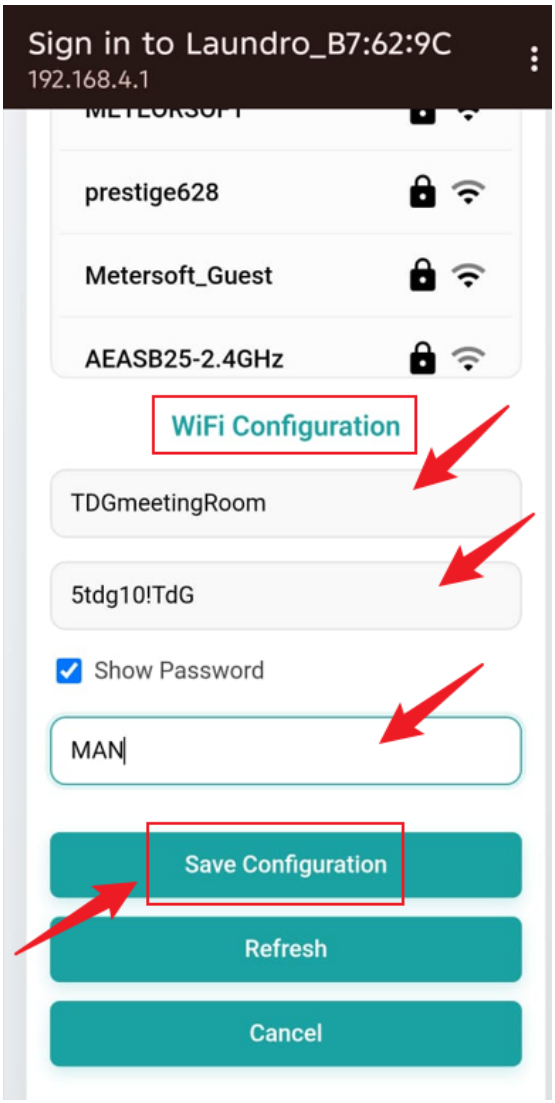


Step 9: The **Wi-Fi Status** page will be displayed, and the device will start configuring automatically. Please wait until the status message reads **"Device Ready for Configuration"**.

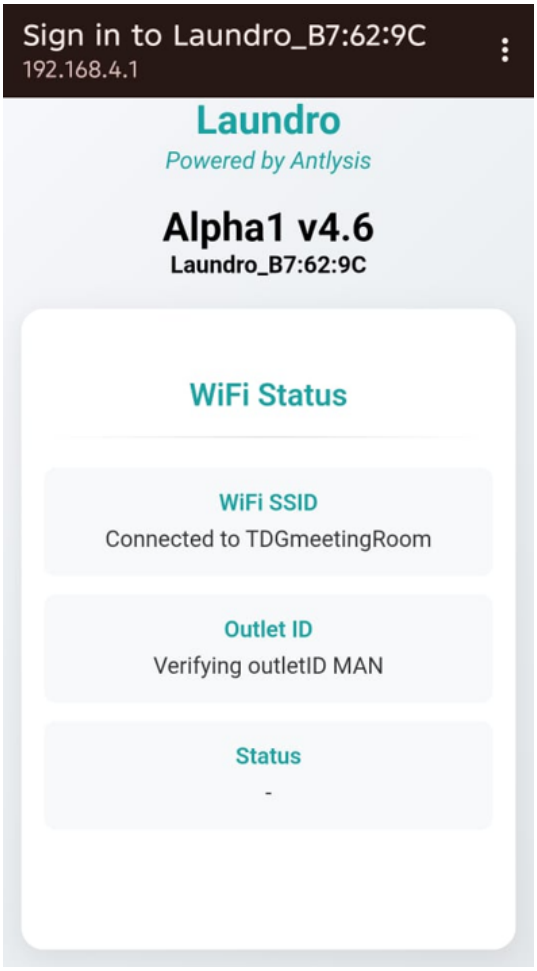
Sign in to Laundro_B7:62:9C
192.168.4.1
Laundro
Powered by Antlysis
Alpha1 v4.6
Laundro_B7:62:9C
WiFi Status
WiFi SSID
Connected to TDGmeetingRoom
Outlet ID
Verifying outletID MAN
Status
-

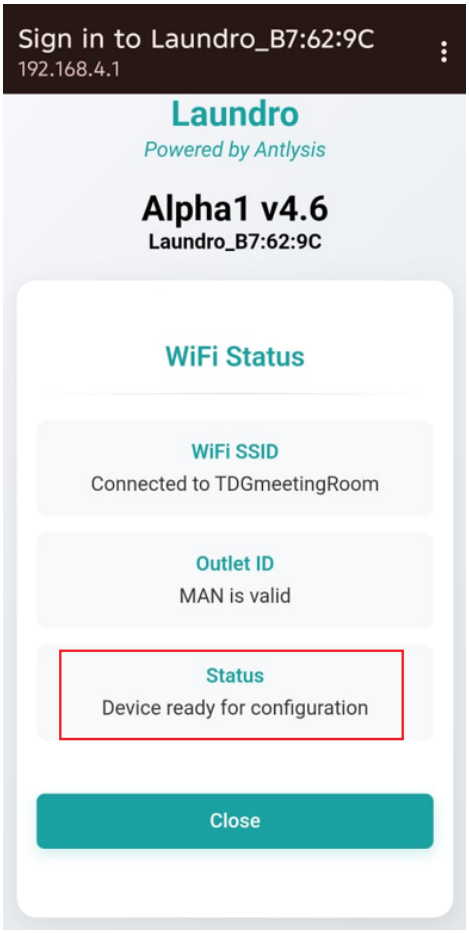
Sign in to Laundro_B7:62:9C
192.168.4.1
Laundro
Powered by Antlysis
Alpha1 v4.6
Laundro_B7:62:9C
WiFi Status
WiFi SSID
Connected to TDGmeetingRoom
Outlet ID
MAN is valid
Status
Device ready for configuration
Close

Step10: Once the configuration process has been completed successfully, the **Wi-Fi (Blue)** and **Internet (Green)** indicator lights on the device will turn on.

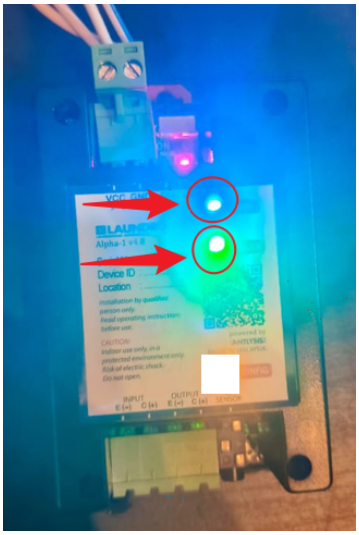

2) It is all done now. You can check the dashboard page to ensure the machine shows as **Online**. For confirmation, you can also try testing a remote activation on the machine.

Revision #7
Created 2026-02-05 02:51:33 UTC by HanZhong
Updated 2026-05-26 08:22:11 UTC by KUNA