
IPSO - Installation

IPSO Washer/Dryer

Example: Dryer



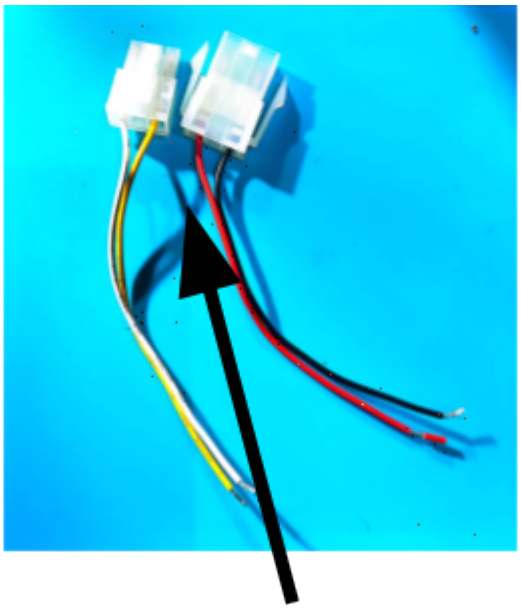


Using this type of wire harness

Example: Washer



Harness Installation

1. The IPSO machine has input and output connectors. Unplug them and connect them to the harness connector.

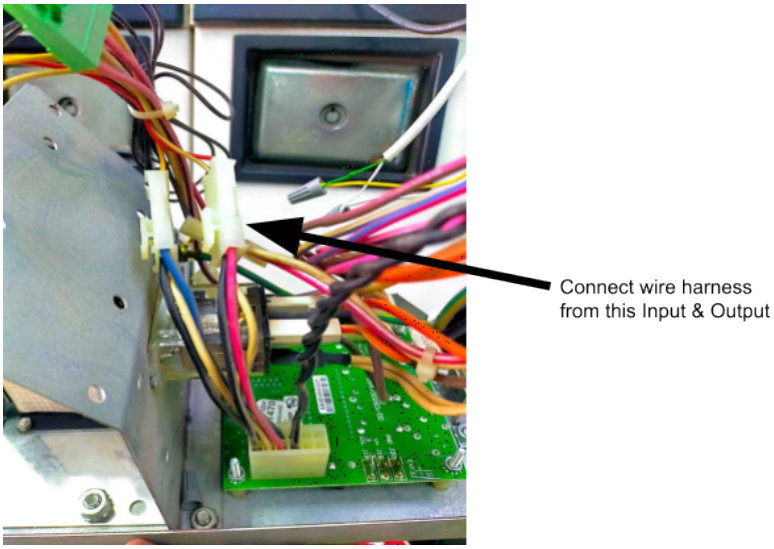


AD_4nXeDb5_kSWl1WqctJWXoPmaE7cnvz2O2qCSJAuc0GbgaOen6pRuVKpEFyB2oQZys21p
Use thick wire 1mm or 1.5mm to connect Output (No3)

2. From the harness connector, connect the output and input to the 4-core wire from the device, following the input and output terminals. Ensure that the input and output negative (–) and positive (+) connections are correct.

3. For this machine, use a 1 mm or 1.5 mm thick cable for the output to ensure a better pulse signal.



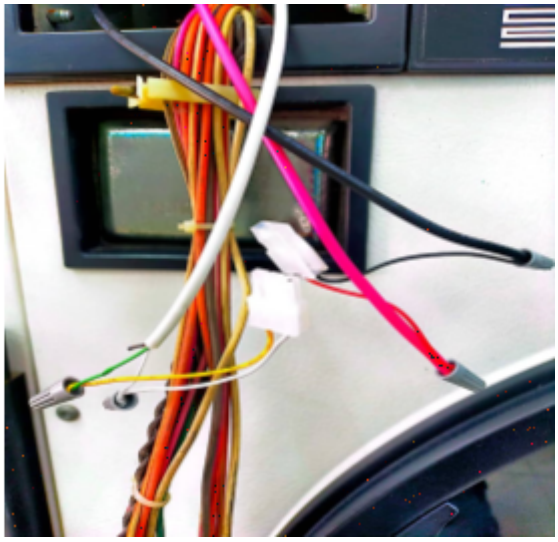

Revision #5
Created 2025-08-14 07:48:49 UTC by KUNA

Updated 2025-08-15 08:15:36 UTC by KUNA