

Change connected WiFi

1) Follow the steps below to connect the device to a Wi-Fi network. Ensure that the Wi-Fi network is available and that you have the correct Wi-Fi ID/Name and password before proceeding.

Device support only 2.4gh.

Step 1- To connect the device to a new Wi-Fi network, first ensure the device is in **Configuration Mode**. The blue LED indicator should be blinking.




Step 2- Open the **Wi-Fi Settings** page on your mobile phone and search for available Wi-Fi name **Example: "Laundro_#:#:#:#:#"**.




Step 3: Select the **Laundro** Wi-Fi network from the list of available networks. When prompted, enter the password:

Step4 - Once the correct password has been entered, tap **Connect** to proceed.

Password:

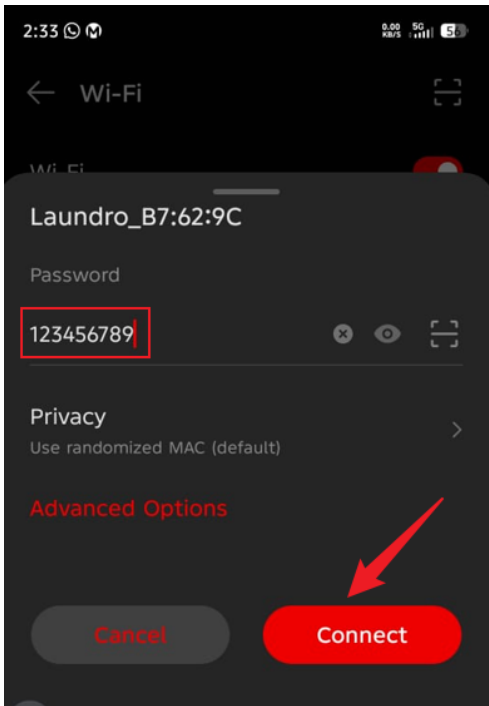


network, you will be redirected to the **Configuration Page**.

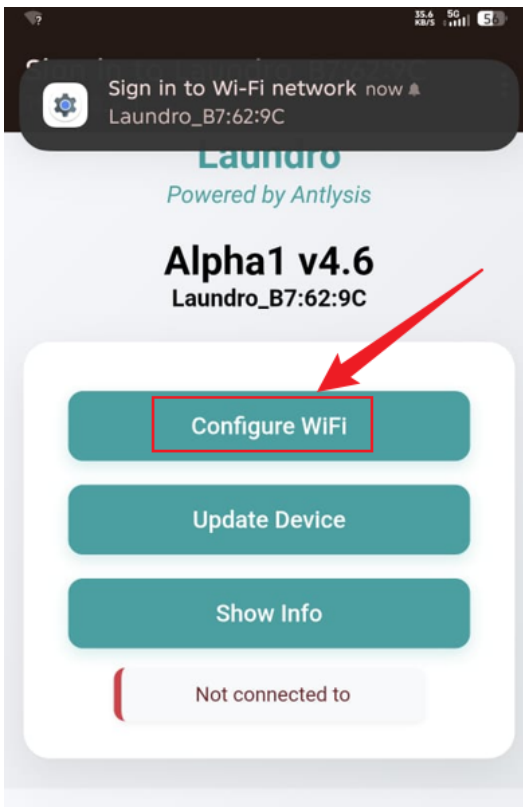


On the **Wi-Fi Configuration** page.

Step 7: From the list of available networks, choose the Wi-Fi network you want to connect to, then scroll down the page.

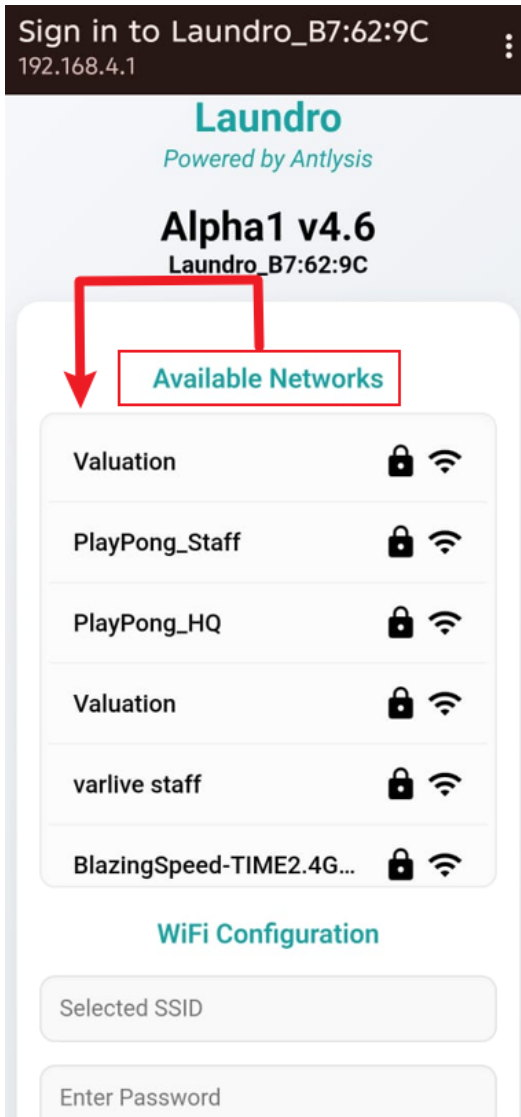

Step 8: Under **Wi-Fi Configuration**, confirm the selected **SSID (Wi-Fi Name)**, enter the Wi-Fi password, and then enter the provided **Outlet ID**. Ensure all information is correct click on **Save Configuration** .

Before selecting **Save Configuration**, double-check the **Wi-Fi password** and **Outlet ID**. Ensure all information is correct and that no hidden spaces have been entered.

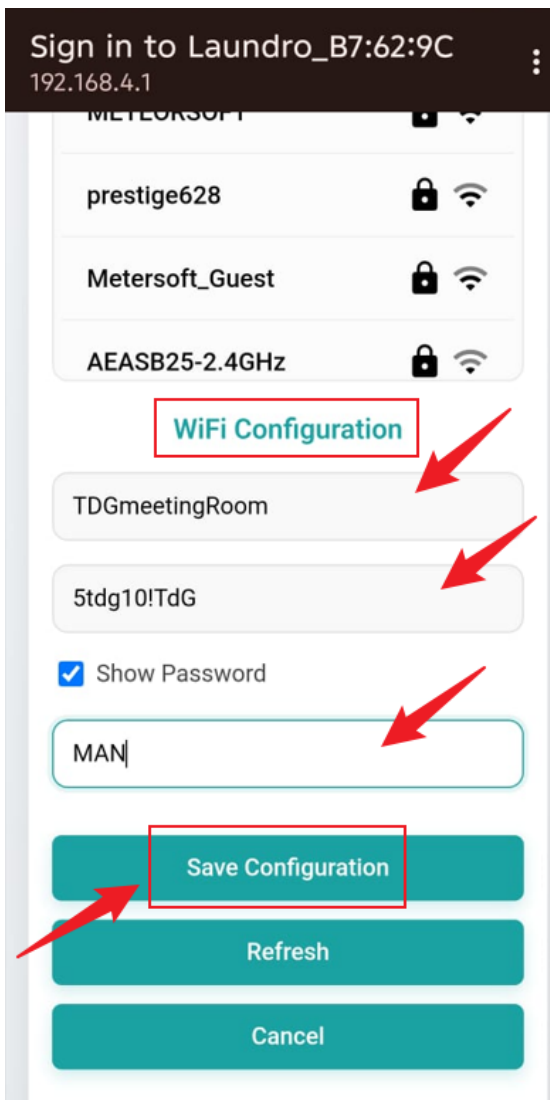

Step 9:The **Wi-Fi Status** page will be displayed, and the device will start configuring automatically. Please wait until the status message reads "**Device Ready for Configuration**".



Laundro

Powered by Antlysis

Alpha1 v4.6

Laundro_B7:62:9C

WiFi Status

WiFi SSID

Connected to TDGmeetingRoom

Outlet ID

Verifying outletID MAN

Status

-



Laundro

Powered by Antlysis

Alpha1 v4.6

Laundro_B7:62:9C

WiFi Status

WiFi SSID

Connected to TDGmeetingRoom

Outlet ID


MAN is valid

Status

Device ready for configuration

Close

Step10: Once the configuration process has been completed successfully, the **Wi-Fi (Blue)** and **Internet (Green)** indicator lights on the device will turn on.

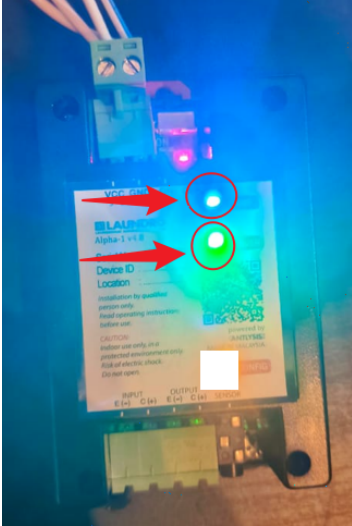

2) It is all done now. You can check the dashboard page to ensure the machine shows as **Online**. For confirmation, you can also try testing a remote activation on the machine.

Revision #7

Created 5 February 2026 02:51:33 by HanZhong

Updated 26 May 2026 08:22:11 by KUNA